




DECOTILE

Structure

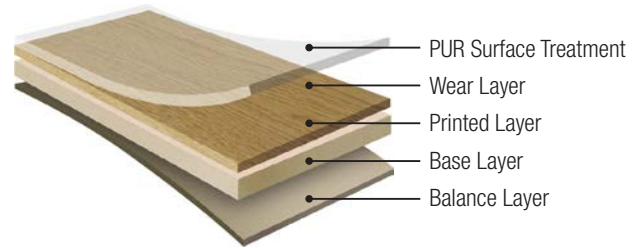

Applications



Size (mm)	180 x 1200 (W/L : 0.55 / 5mm)
Planks Per Pack	8
m2 Per Pack	1.73

Technical Data

Characteristic	Standard	Unit	
		T	5.0
		W/L(mm)	0.55
Type of Flooring	EN ISO 10582		LVT
Surface Treatment			PUR
Size	EN ISO 24342	%	≤ 0.15
Straightness & Squareness	EN ISO 24342	%	≤ 0.35
Classification	EN 685		Class 23/33/42
Overall Thickness	EN ISO 24346	mm	5.0
Wear Layer Thickness	EN ISO 24340	mm	0.55
Wear Resistance	EN 660-2		T
Residual Indentation	EN ISO 24343-1	mm	≤ 0.1
Dimensional Stability	EN ISO 23999	%	≤ 0.25
Curling	EN ISO 23999	mm	≤ 2
Colour Fastness to Light	EN ISO 105-B02		≥ 6
Castor Chair Test	EN ISO 4918		No Change
Burning Characteristic	EN 13501-1		Bfl-s1
Critical Radiant Flux	EN ISO 9239-1		≥ 8.0 kW/m ²
Chemical Resistance	EN ISO 26987		No Change
Slip Resistance	EN 13893		Class DS
	DIN 51130		R9

Benefits



Eco & Human-Friendly Product

- FloorScore® and DIBt certified for low VOCs
- Phthalate Free (DEHP, DBP, BBP, DINP, DIDP, DNOP) & Heavy Metal Free (Cd-Pb-Hg-Cr6+)
- Made from safer, stronger, raw materials



Excellence in Design

- Available in natural and modern colour palette
- High-resolution imaging and patterns for realistic wood visuals



Durable Technology

- PUR double coating improves resistance to scratches and stains
- Quality assured by warranties

Warranty

5 Year Guarantee for manufacturing defects and wear-out*

*Warranty is valid only when installed in accordance with LG Hausys' Installation guide



Expertise from the floor up

www.jacobsens.co.nz